LAYOUT CONCEPTS

Cobalt SS Point Motor Controlled By A Cobalt S-Lever

DCC Track Power Bus or Accessory Bus or Regulated 12V to 23V DC Supply

The Track to Frog Switch wiring depends on the position of the motor at the point.

If a frog polarity is incorrect, swap the **FROG L** and **FROG R** wires for that motor.

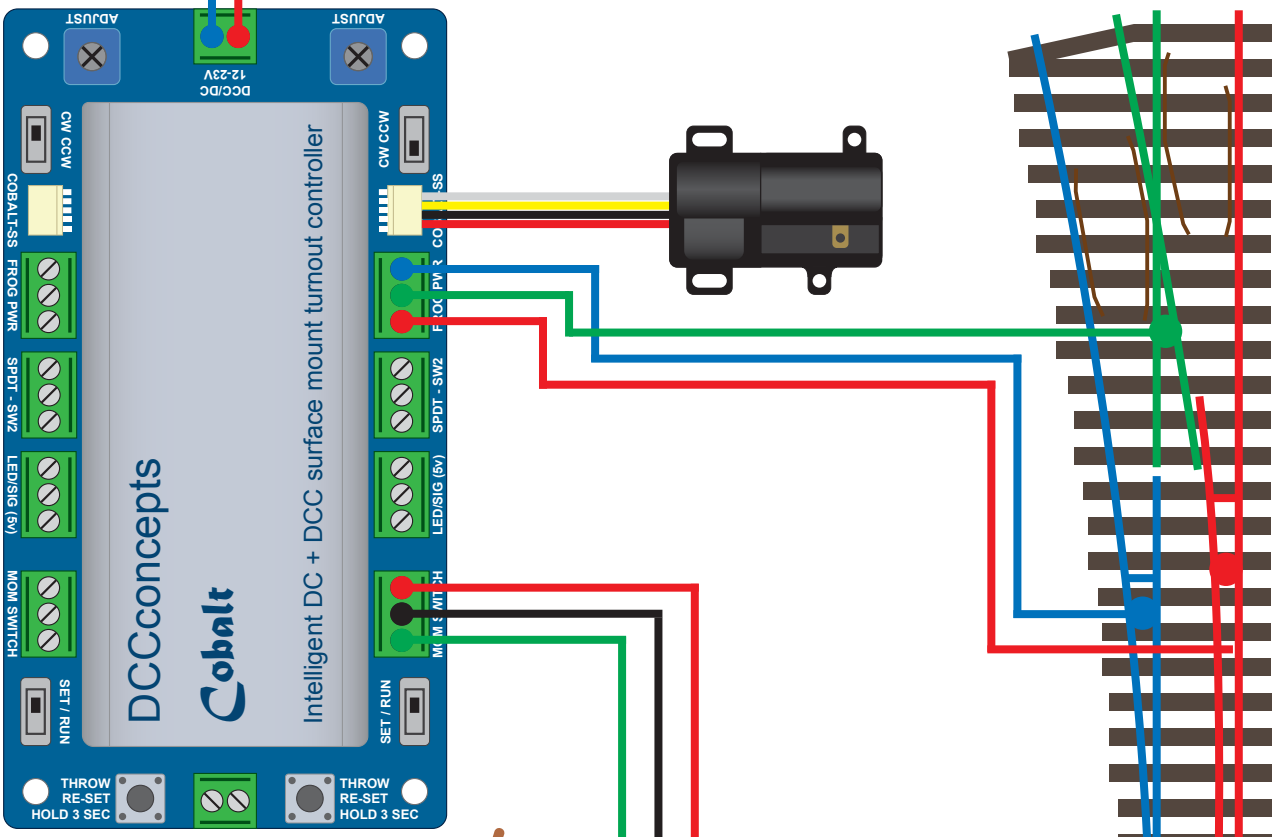

Cobalt SS Surface Mount Point Motor DCP-CBSS-2

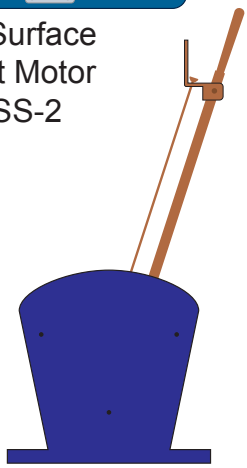

Cobalt S-Lever DCP-CBS

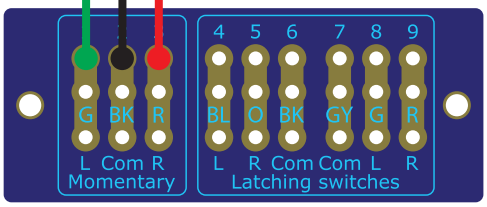

To reverse the output to match the S-Lever throw, swap the green and red wires at the relevant S-Lever or Cobalt SS connection.

Layout Concepts Ltd, Unit E, The Sidings, Settle, BD24 9RP, United Kingdom - www.layoutconcepts.com - +44 (0) 1729 821 080 - sales@layoutconcepts.com