LAYOUT CONCEPTS

Cobalt SS Point Motor Controlled By An ATS Toggle Switch With LEDs

DCC Track Power Bus or Accessory Bus or Regulated 12V to 23V DC Supply

The Track to Frog Switch wiring depends on the position of the motor at the point.

If a frog polarity is incorrect, swap the **FROG L** and **FROG R** wires for that motor.

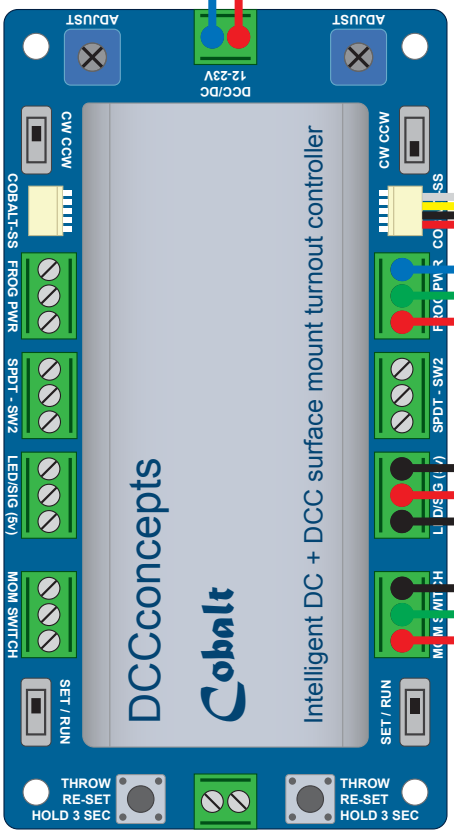

Cobalt SS Surface Mount Point Motor DCP-CBSS-2





330Ω Resistors



330Ω Resistors



DCD-ATS
Alpha Toggle Switch
On-Off-On
Spring To Centre
Toggle Switch

